

MODELS: **BMGN1470EN**
BMGN1960EN
TABLES:
Refrigerator Table for Salad gastronorm 1/1 700 Series.

General Strengths

- ✓ *New line of refrigerator tables improved in design, robustness and maintaining the same capacity and high standards of quality and reliability.*
- ✓ *Improvement of the energy classification, due to the use of R290 refrigerant, electronic fans and optimized circulation of the air for improved temperature uniformity in the interior.*
- ✓ *New design of doors with double grip handle. Doors equipped with hinges for automatic return and permanent pressure during closing. The automatic return is free when the opening exceeds 95°. They include four-chamber "cleanless" flat door gasket easily removable*
- ✓ *The new user-friendly controller IP65 has greater precision in temperature control. Easier to adjust the temperature range we want to achieve.*
- ✓ *All the condensing units are 100% tested, in a Helium chamber for the detection of gas leakage.*
- ✓ *Infrico is audited and certified by an international organization AENOR in ISO 9001: 2015 (Quality); ISO 14001: 2015 (Environment); OSHAS 18001: 2007 (Worker Safety and Health) and by INTERTEK in accordance with UL 471 and NSF 7.*

Important: The trays should contain previously refrigerated product.



BMGN 1960 EN

MODELS	Dimensions (mm)			No. Doors	No. Parrillas / Set Guides	Chamber volume (L)	Gross volume (L)	Temperature regime (°C)	Ref	Gas charge (gr.)	Net weight (Kg.)
	Length	Depth	Height place								
BMGN1470EN	1468	700	850	2	2 / 10	305	874	0 °C / +6°C	R134a	260	134
BMGN1960EN	1960	700	850	3	3 / 15	465	1166	0 °C / +6°C	R134a	275	161

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODELS: **BMGN1470EN**
BMGN1960EN
TABLES:
Refrigerator Table for Salad gastronorm 1/1 700 Series.
STANDARD CHARACTERISTICS
➤ Exterior

- Stainless Steel AISI 304,
- Compact structure totally injected,
- Adjustable legs up to 200 mm, allowing total height of 900 mm,

➤ Interior

- Stainless Steel AISI 304,
- Interior with wide radius joints for easy cleaning,
- Drain inside the chamber,

➤ Doors

- Doors with integrated handle with double grip and pivoting hinge with opening lock,
- Throttled door with four-chamber easy-to-replace door gasket,
- Door clear 375x520 mm,

➤ Drawers (Optional)

- Drawers with telescopic guides with a larger exit to save the front surface of the worktop,
- Interior measurements; kit 3 drawers BMGN 1 / 3x100 (302x518x105), kit 2 drawers BMGN 1 / 2x200 (302x518x205), kit of 2 drawers BMGN 2 / 3x300 (302x518x307) + BMGN 1 / 3x100 (302x518x105).
- Drawer system with self-closing.

OPTIONAL

- ☐ Lock, ☐ Electrical connection 220 V / 1 ph / 60 Hz.,
- ☐ Wheels, ☐ Electrical connection 115 V / 1 ph / 60 Hz.
- ☐ Refrigerant R290,

BMGN 1470 EN
 (GN 1/2) = 1; (GN 1/3) = 6

BMGN 1960 EN
 (GN 1/2) = 1; (GN 1/3) = 9

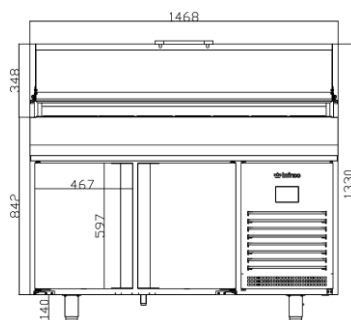
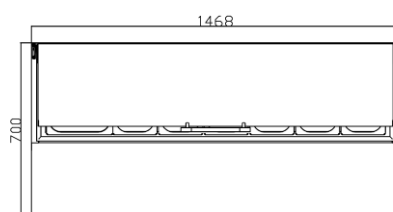
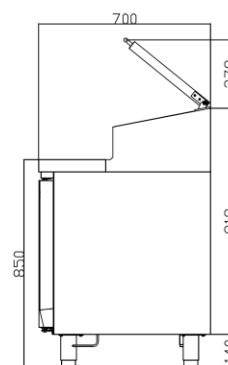
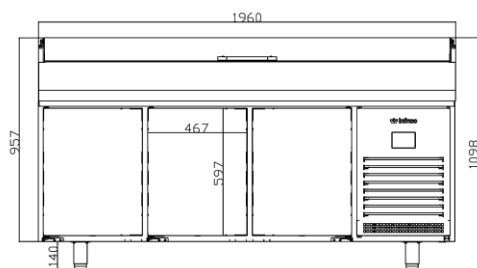
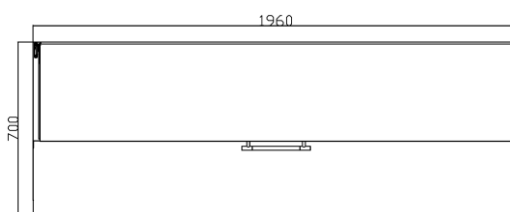

MODELS	Dimensions Palletizing (mm)			Weight Pallet (Kg.)	Power (W)	Comp. (HP)	Frigorific power (W at -10°C)	Consumption (kWh/24h)	Intensity (A)	Container 20' / 40' / 40' HC	Trailer
	Length	Depth	Height place								
BMGN1470EN	1520	800	990	154	400	1/4	298	3,12	2,2	20 / 30 / 30	50
BMGN1960EN	2010	800	990	186	430	1/3	395	3,57	2,4	14 / 28 / 28	38

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

Review: 01 Date: 02/02/2018 BMGN1470EN, BMGN1960 EN_FT_En_0.1



- Electrical connection: 230 V / 1 ph / 50 Hz

MODELS: BMGN1470EN
BMGN1960EN
TABLES:
Refrigerator Table for Salad gastronorm 1/1 700 Series.
GENERAL VIEW
FRONT VIEW

BMGN 1470 EN
TOP VIEW

SIDE VIEW

BMGN _ EN

BMGN 1960 EN

CONNECTIONS

MODELS	A (mm)	B (mm)	C (mm)	D (mm)
BMGN1470EN	540	112	61,5	61,5
BMGN1960EN	787	112	61,5	61,5

