

MODELS: MR 1620 EN
MR 2190 EN
Euronorma 600x400 salada, pizza and pastry prep refrigerator counter. 800 Series.

General Strengths

- ✓ *New line of refrigerated tables improved in design, robustness and reliability, maintaining the same capacity and complying with quality standards to continue improving the energy classification.*
- ✓ *Improvement of the energy classification, due to the use of R290 refrigerant, electronic fans and optimized circulation of the air for improved temperature uniformity in the interior.*
- ✓ *New design of doors with double grip handle. Doors equipped with hinges for automatic return and permanent pressure during closing. The automatic return is free when the opening exceeds 95°. They include four-chamber "cleanless" flat door gasket easily removable*
- ✓ *The new user-friendly controller IP65 has greater precision in temperature control. Easier to adjust the temperature range we want to achieve.*
- ✓ *All the condensing units are 100% tested, in a Helium chamber for the detection of gas leakage.*
- ✓ *Infrico is audited and certified by an international organization AENOR in ISO 9001: 2015 (Quality); ISO 14001: 2015 (Environment); OSHAS 18001: 2007 (Worker Safety and Health) and by INTERTEK in accordance with UL 471 and NSF 7.*


MR 1620 EN

MR 2190 EN

MODELS	Dimensions (mm)			No. Doors	No. Grates / Set Guides	Chamber volume (L)	Gross volume (L)	Temperature regime (°C)	Ref.	Gas charge (gr.)	Net weight (Kg.)
	Length	Depth	Height place								
MR 1620EN	1618	800	850 1050	2	2 / 9	405	1100 1360	+2 °C / +6°C	R134a	260	140
MR 2190EN	2185	800	850 1050	3	3 / 13	625	1490 1840	+2 °C / +6°C	R134a	280	182

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODELS: MR 1620 EN	MR 2190 EN	Euronorma 600x400 salad, pizza and pastry prep refrigerator counter. 800 Series.
---------------------------	-------------------	---

STANDARD CHARACTERISTICS

➤ Exterior

- Stainless Steel AISI 304,
- Compact structure totally injected,
- Adjustable legs up to 200 mm, allowing total height of 900 mm,
- Countertop 50mm thick,

➤ Interior

- Stainless Steel AISI 304,
- Interior with wide radius joints for easy cleaning,
- Drain inside the chamber,

➤ Doors

- Doors with integrated handle with double grip and pivoting hinge with opening lock,
- Throttled door with four-chamber easy-to-replace door gasket,
- Possibility of changing the opening direction of the doors,
- Door clear 450x526 mm,

➤ Insulation

- Polyurethane insulation 70 mm thick, injected at high pressure free of CFC's with density 40 Kg / m3,
- Zero ODP and Low GWP.

➤ Grates

- (1) 600x400 mm internal grate per door,
- Guides and grates easily removable for cleaning.

➤ Refrigeration

- Temperature and defrost regulated by a digital touch controller IP 65.
- Ventilation system and frontal condensation,
- Forced Evaporation System,
- Plastic tray with inlaid heating pipe,
- Evaporators treated with anti-corrosion polyester Epoxy,
- Improvement of the extraction of the new monoblock cooling system,
- Climatic class 4 (30°C,55%HR).

➤ Electrical

- Electrical connection: 230 V / 1 ph / 50 Hz.



OPTIONAL

- | | |
|--|---|
| ☐ Grate, | ☐ R 290 refrigerant, |
| ☐ Set of guides, | ☐ Garnish rack, |
| ☐ Lock, | ☐ Wheels, |
| ☐ Stainless Tray, | |

- | |
|--|
| ☐ Tropicalization at 43° |
| ☐ Electric connection 220 V / 1 ph / 60 Hz, |
| ☐ Electric connection 115 V / 1 ph / 60 Hz. |

MR 1620 EN
(GN 1/4X150) = 9



MR 2190 EN
(GN 1/4X150) = 13

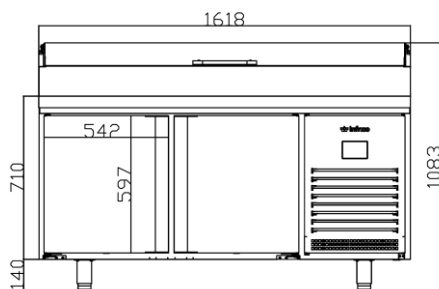
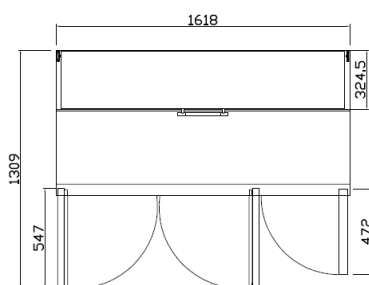
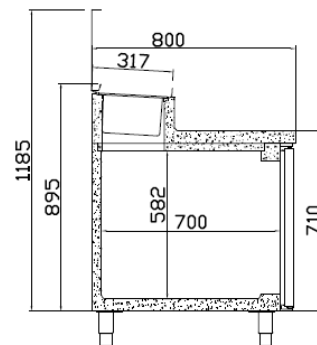
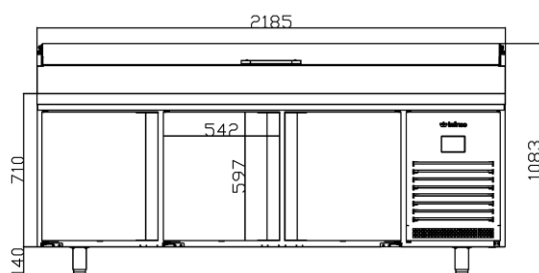
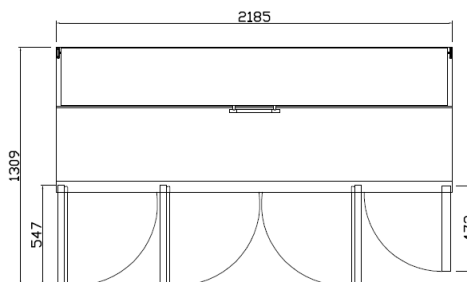


MODELS	Dimensions Palletizing (mm)			Weight Pallet (Kg.)	Power (W)	Comp. (HP)	Frigorific power (W at -10°C)	Consum. (kWh/24h)	Intensity (A)	Container 20' / 40' / 40'HC	Trailer
	Length	Depth	Height place								
MR 1620 EN	1710	870	1130	165	550	1/3	395	3,23	3,13	12 / 28 / 28	32
MR 2190 EN	2230	870	1130	207	590	3/8	464	3,47	3,35	12 / 26 / 26	28

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODELS: MR 1620 EN
MR 2190 EN
Euronorma 600x400 salada, pizza and pastry prep refrigerator counter. 800 Series.

GENERAL VIEW

FRONT VIEW

MR 1620 EN
TOP VIEW

SIDE VIEW

MR_EN

MR 2190 EN


CONNECTIONS

MODELS	A (mm)	B (mm)	C (mm)	D (mm)
MR 1620 EN	615	113	62	60
MR 2190 EN	898	113	62	60

