

MODELS: BMGN1470GR	BMGN1960GR	BMGN2450GR	TABLES: Gastronorm 1/1 Refrigerator Counter for Remote Compressor
---------------------------	-------------------	-------------------	--

General Strengths

- ✓ *New line of refrigerated tables improved in design, robustness and maintaining the same capacity and high standards of quality and reliability.*
- ✓ *Improvement of the energy classification, due to the optimized air circulation for a better temperature uniformity in the interior.*
- ✓ *New design double handle door for ease of use. In addition, they are equipped with hinges for automatic return and permanent pressure during closing. The automatic return is free when the opening exceeds 95°. Includes four-chamber "cleanless" flat strip easily removable.*
- ✓ *The new digital control easy and intuitive-touch screen IP65 protection has a greater precision in the control of the temperature.*
- ✓ *Infrico is AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.*



MODELS	Dimensions (mm)			Nº Doors	Nº Shelves	Chamber Volume (L)	Gross Volume (L)	Temperature Range (°C)	Ref.	Ref. Weight (gr.)	Net Weight (Kg.)
	Width	Depth	High								
BMGN1470GR	1160	700	850	2	2 / 10	305	740	-2 °C / +8°C	-	-	107
BMGN1960GR	1652	700	850	3	3 / 15	465	1000	-2 °C / +8°C	-	-	137
BMGN2450GR	2144	700	850	4	4 / 20	630	1300	-2 °C / +8°C	-	-	179

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODELS: BMGN1470GR	BMGN1960GR	BMGN2450GR	TABLES: Gastronorm 1/1 Refrigerator Counter for Remote Compressor
---------------------------	-------------------	-------------------	--

STANDARD CHARACTERISTICS

➤ Exterior

- AISI 304 Series Stainless Steel.
- Completely injected compact structure.
- Adjustable legs up to 200 mm, allowing total unit height of 900 mm.
- Worktop with sanitary backsplash of 100 mm and 50 mm of thickness.

➤ Interior

- AISI 304 Series Stainless Steel.
- Wide rounded corners to aid cleaning.
- Drain inside the cabinet.

➤ Insulation

- Polyurethane insulation 70 mm thick, injected at high pressure free of CFC's with density 40 Kg / m3,
- Zero ODP and Low GWP.

➤ Doors

- Doors with integrated handle with double grip and pivoting hinge with opening lock,
- Interior of door inserted with a four-chamber door gasket easy to remove.
- Possibility of changing the opening direction of the doors,
- Door clearance of 375x520 mm.

➤ Drawers (Optional)

- Drawers with telescopic guides for complete opening.
- Body of drawer; kit 3 drawers BMGN 1/3x100 (302x518x105), kit 2 drawers BMGN 1/2x200 (302x518x205), kit 2 drawers BMGN 2/3x300 (302x518x307) + BMGN 1/3x100 (302x518x307)
- Drawers with self-closing device.

➤ Grates

- (1) 325x530 mm internal grate,
- Guides and grates easily removable for cleaning.

➤ Refrigeration

- Temperature and defrost regulated by a digital touch controller IP 65.
- Forced Evaporation System,
- 3/8" connection tubes to the evaporator (capillary not included),
- Evaporators treated with anti-corrosion polyester Epoxy,

➤ Electrical

- Electrical connection: 230 V / 1 ph / 50 Hz



OPTIONAL

- ☐ Wire shelf,
- ☐ Glass door (unit),
- ☐ Electrical connection 220 V / 1 ph / 60 Hz.,
- ☐ Set of guides,
- ☐ Expansion valve,
- ☐ Electrical connection 115 V / 1 ph / 60 Hz.
- ☐ Lock,

MODELS	Dimensions Palletizing (mm)			Crated Weight (Kg.)	Power (W)	Comp. (HP)	Cooling Power (W to -10°C)	Cons. (kWh/24h)	Inten. (A)	Container 20' / 40' / 40'HC	Trailer
	Width	Depth	High								
BMGN1470GR	1290	760	990	117	-	-	298	-	-	22 / 48 / 48	66
BMGN1960GR	1700	760	990	149	-	-	395	-	-	14 / 28 / 28	46
BMGN2450GR	2200	760	990	194	-	-	464	-	-	14 / 28 / 28	36


* Consult recommended compressor.
WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE.

Review: 01 Date: 02/02/2018 BMGN1470GR, BMGN1960GR, BMGN2450GR_FT_En_0_1

MODELS: BMGN1470GR	BMGN1960GR	BMGN2450GR	TABLES: Gastronorm 1/1 Refrigerator Counter for Remote Compressor
---------------------------	-------------------	-------------------	--


GENERAL VIEW

FRONT VIEW




BMGN 1470 GR


TOP VIEW





SIDE VIEW




BMGN _GR

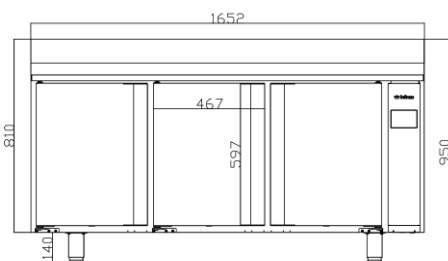

BMGN 1960 GR

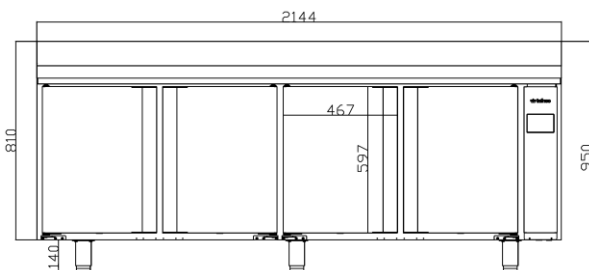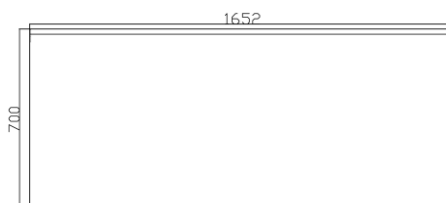


BMGN 2450 GR

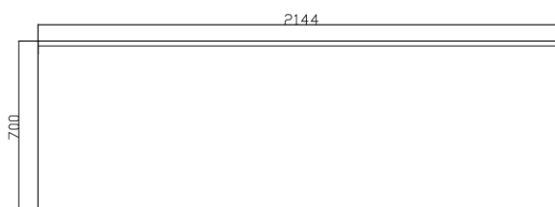

CONNECTIONS

MODELS	A (mm)	B (mm)	C (mm)	D (mm)
BMGN1470GR	540	112	50	51
BMGN1960GR	787	112	50	51
BMGN2450GR	1033	112	50	51

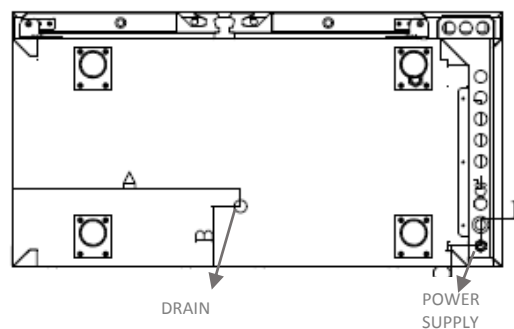

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

Review: 01 Date: 02/02/2018 BMGN1470GR, BMGN1960GR, BMGN2450GR_FT_En_0.1