

General Strengths

- ✓ *New line of refrigerated tables improved in design, robustness and reliability, maintaining the same capacity and complying with quality standards to continue improving the energy classification.*
- ✓ *Improvement of the energy classification, due to the use of R290 refrigerant, electronic fans and optimized circulation of the air for improved temperature uniformity in the interior.*
- ✓ *Doors equipped with hinges for automatic return and permanent pressure during closing. The automatic return is free when the opening exceeds 95°. They include a triple easily replaceable door gasket. The doors are reversible.*
- ✓ *The new user-friendly controller IP65 has greater precision in temperature control. Easier to adjust the temperature range we want to achieve.*
- ✓ *All the condensing units are 100% tested, in a Helium chamber for the detection of gas leakage.*
- ✓ *Infrico is audited and certified by an international organization AENOR in ISO 9001: 2015 (Quality); ISO 14001: 2015 (Environment); OSHAS 18001: 2007 (Worker Safety and Health) and by INTERTEK in accordance with UL 471 and NSF 7.*



ME 1000 KB



ME 1000 PIZZA

MODELS	Dimensions (mm)			No. Doors	No. Grates	Chamber volume (L)	Gross volume (L)	Temperature regime (°C)	Ref.	Gas charge (gr.)	Net weight (Kg.)
	Length	Depth	Hight place								
ME1000PIZZA	978	700	865 1129	2	2 / 6	230	592 773	0 °C / +6°C	R134a	165	155
ME1000KB	978	700	1125	2	2 / 6	230	770	0 °C / +6°C	R134a	165	110

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODELS: **ME1000PIZZA**
ME1000KB
Cooling Table gastronorm 1/1 700 Series for Salad

STANDARD CHARACTERISTICS

➤ Exterior

- Stainless Steel AISI 304,
- Compact structure totally injected,

➤ Interior

- Stainless Steel AISI 304,
- Interior with wide radius joints for easy cleaning,
- Drain inside the chamber,

➤ Insulation

- Polyurethane insulation 55 mm thick, injected at high pressure free of CFC's with density 40 Kg / m3,
- Zero ODP and Low GWP.

➤ Doors

- Doors with integrated handle and pivoting hinge with opening lock,
- Throttled door with three-chamber easy-to-replace door gasket,
- Possibility of changing the opening direction of the doors,
- Door clear 375x402 mm,

➤ Countertops

- Granite countertop for pizza with glass protector,
- Important: The trays must contain previously refrigerated product.

➤ Grates

- Interior grates 325x530 mm,
- Guides and grates easily removable for cleaning.

➤ Refrigeration

- Temperature and defrost regulated by a digital touch controller IP 65.
- Energy-saving non-electric condensate pan,
- Ventilated Condensation System,
- Improvement of the extraction system of the condensing unit,
- Evaporators treated with anti-corrosion polyester Epoxy,
- Climatic class 4 (30°C, 55HR),

➤ Electrical

- Electrical connection: 230 V / 1 ph / 50 Hz.



OPTIONAL

- | | |
|--|--|
| ☐ Grate, | ☐ Lock, |
| ☐ Set of guides, | ☐ Glass door (unit) |
| ☐ Combination of ME1000PIZZA trays, | ☐ Electric connection 220 V / 1 ph / 60 Hz, |
| ☐ Combination of ME1000KB trays, | ☐ Electric connection 115 V / 1 ph / 60 Hz. |
| ☐ R290 refrigerant, | |

ME 1000 KB

(GN 1/3) = 6; (GN 1/6) = 3


ME 1000 PIZZA

(GN 1/3) = 1; (GN 1/6) = 3









MODELS	Dimensions Palletizing (mm)			Weight Pallet (Kg.)	Power (W)	Comp. (HP)	Frigorific power (W at -10°C)	Consum. (kWh/24h)	Intensity (A)	Container 20' / 40' / 40' HC	Trailer
	Length	Depth	Height place								
ME1000PIZZA	1580	800	1300	185	424	1/5	254	2,61	2,41	7 / 15 / 30	50
ME1000KB	1080	800	1180	120	424	1/5	254	2,61	2,41	28 / 56 / 56	72

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

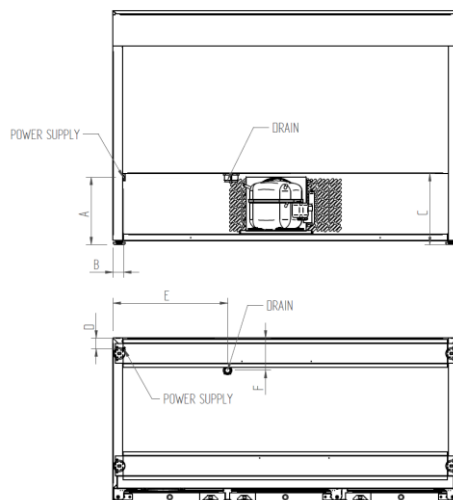
MODELS: **ME1000PIZZA**
ME1000KB
Cooling Table gastronorm 1/1 700 Series for Salad

GENERAL VIEW

FRONT VIEW

ME1000PIZZA
TOP VIEW

SIDE VIEW

ME_PIZZA

ME1000KB

ME_KB

CONNECTIONS

MODELS	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
ME1000PIZZA	286	45	302	46	487	137
ME1000KB	286	45	302	46	487	137



WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE